


530-555W 0-5W Positive Tolerance



MBB&SMBB Half-cut Cell Technology
New circuit design, lower internal current, and lower Rs loss.



High Power Density
A new generation of monocrystalline products with reduced resistive losses for greater power output.





Mechanical Properties
An aluminum frame in special design for better mechanical properties and more efficient installation.



Excellent Weather Resistance
The solar modules can meet the IEC standard requirements with strong resistant to risks such as salt spray, ammonia gas, dust, snail marks and electric potential induced attenuation.



4 Times 100% EL Detection
Guarantee no micro cracks

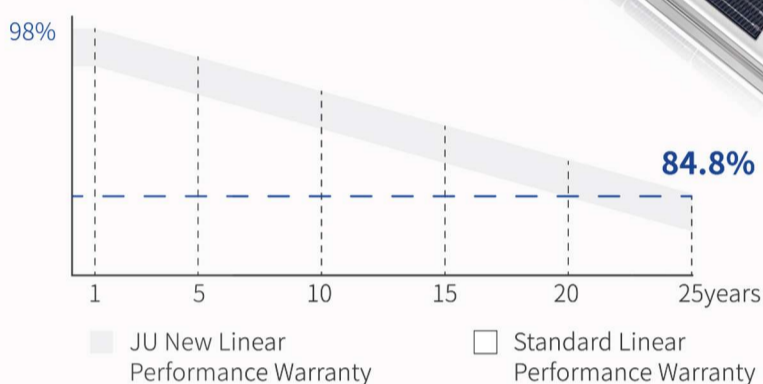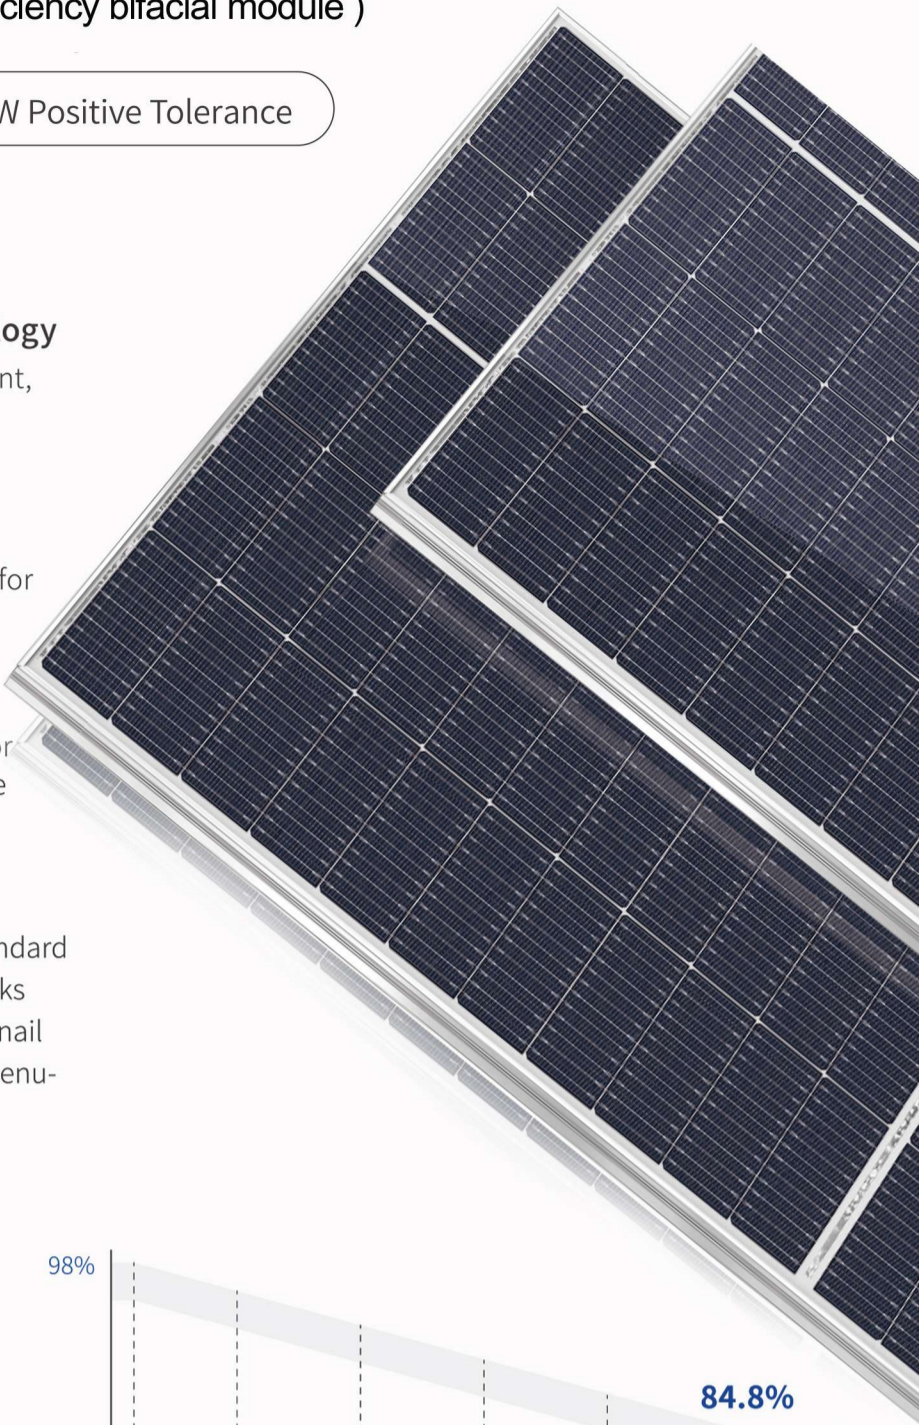

■ JU New Linear Performance Warranty □ Standard Linear Performance Warranty

12years Material & process Warranty

25years Linear Performance Warranty

0.55% Linear Power Degradation

PRODUCT QUALITY SYSTEM & CERTIFICATION



ELECTRICAL PROPERTIES

SM-210M-66HBG 132 PCS

STC : irradiance, 1000W/m²; cell temperature, 25°C; spectral range, AM1.5

NOCT: irradiance, 800 W/m²; ambient temperature, 20 °C; spectral range, AM1.5; wind speed, 1m/s

	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum power - P _{mp} (W)	530	401	535	405	540	409	545	413	550	417	555	420
Open-circuit voltage - V _{oc} (V)	37.14	35.00	37.35	35.10	37.75	35.30	37.76	35.50	37.95	35.70	38.13	35.90
Short-circuit current - I _{sc} (A)	18.31	14.76	18.36	14.80	18.41	14.84	18.47	14.88	18.52	14.92	18.56	14.96
Maximum operating voltage - V _{mp} (V)	30.81	28.60	31.02	28.80	31.23	29.00	31.43	29.20	31.62	29.30	31.83	29.50
Maximum operating current - I _{mp} (A)	17.21	14.01	17.25	14.06	17.31	14.10	17.35	14.15	17.40	14.19	17.44	14.23
Module conversion efficiency - η _m	20.28%		20.48%		20.67%		20.86%		21.05%		21.24%	
Power tolerance (W)	(0, +5)											
Mechanical load	Front5400Pa/Back2400Pa											
Maximum system voltage (V)	1500											
Maximum series fuse rating (A)	30											
Operating temperature	-40~+85°C											

MECHANICAL PROPERTIES

Module dimensions(L*W*H)	2384 x 1096 x 35mm
Weight	28.6kg
Cell quantity	110PCS
Cell model	PERC Monocrystalline210 x 105mm
Glass	3.2mm AR, High Transmission, tempered glass
Frame	Anodized aluminium alloy
Junction box	IP68 Rated
Output line	4.0mm ² , wire length 300mm
Connector	MC4 Compatible

TEMPERATURE CHARACTERISTIC

Temperature coefficient (P _{max})	-0.34% / °C
Temperature coefficient (V _{oc})	-0.25% / °C
Temperature coefficient (I _{sc})	+0.04% / °C
NMOT	43±2°C

PACKAGING

Container	40HQ
PCS / Pallet	31
PCS / Container	620

PRODUCT ASSEMBLY DRAWING(mm)

